




Clapet de nez en fonte / Flap Valve Series L1 26

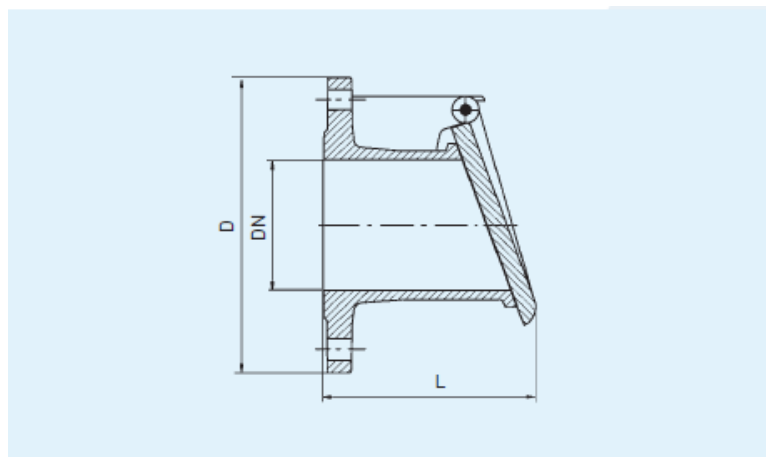

Dimensions en mm · dimensions in mm			kg/pièce kg/piece
DN	D	L	
50	165	160	5,0
65	185	170	6,0
80	200	180	8,0
100	220	185	10,0
125	250	200	13,0
150	285	210	17,0
200	340	220	27,0
250	395	245	42,0
300	455	255	54,0
400	565	390	117,0

- Dimensions des brides PN10 selon norme ISO 7005-2 et EN 1092-2
- Corps en fonte ductile selon EN1563,
- Revêtement époxy poudre (RAL 5015) 250µ,
- Boulonnerie X20Cr13,
- Joint élastomère EPDM
- Utilisation : 1 à 60°C

- Flange drilling is according to ISO 7005-2 and EN 1092-2
- Body in ductile iron according to EN1563,
- Epoxy blue coating (RAL 5015)
- Bolts X20Cr13;
- Sealing in EPDM elastomer
- Working temperature: 1 to 60 °C