




Manchon d'adaptation PE/laiton avec filetage femelle Rp COOL-FIT 2.0

Exécution:

- Raccord avec bout lisse PE100 SDR11 métrique
- Filetage femelle Rp en laiton CuZn40Pb2
- joint: o-ring EPDM Nr. 48 41 01
- Y compris isolation en mousse de NBR

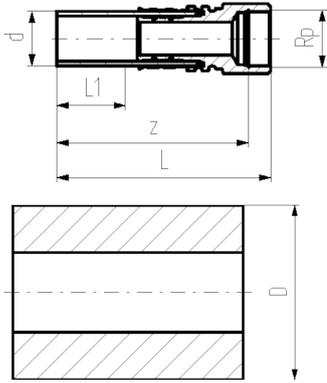

d	D	Thread	Pouces	DN	SDR	PN	Code	poids	L	L1	z
(mm)	(mm)		(inch)	(mm)		(bar)		(kg)	(mm)	(mm)	(mm)
32	70	Rp	½	25	11	16	738 954 008	0,210	132	36	118
32	70	Rp	¾	25	11	16	738 954 018	0,237	132	36	116
32	70	Rp	1	25	11	16	738 954 028	0,264	132	36	115
40	78	Rp	1 ¼	32	11	16	738 954 009	0,667	157	40	141
50	88	Rp	1 ½	40	11	16	738 954 010	0,713	150	44	128
63	101	Rp	2	50	11	16	738 954 011	1,246	164	48	140

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>