


Réductions



Réductions avec fixation du tube intégrée

- PE 100 SDR 11 (ISO S5)
- 10 bar gaz / 16 bar eau
- connecteurs 4 mm
- indicateur de soudage

d	d2	Code	EUR	SP	poids	d1	L	L1	L2	z	Tube SDR
(mm)	(mm)				(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	
25	20	753 901 639	17,61	1	0,051	35	74	34	34	6	9-11
32	20	753 901 640	17,61	1	0,056	44	79	33	36	10	9-11
32	25	753 901 641	17,61	1	0,062	44	79	33	36	10	9-11
40	20	753 901 644	22,66	1	0,069	54	88	33	39	15	9-11
40	25	753 901 645	22,66	1	0,084	54	88	33	39	15	9-11
40	32	753 901 646	22,66	1	0,095	54	88	33	39	13	9-11
50	32	753 901 651	28,41	1	0,124	66	96	35	43	18	9-11
50	40	753 901 652	31,38	1	0,119	66	96	39	43	14	9-11
63	32	753 901 656	33,85	1	0,158	81	105	35	48	23	9-11
63	40	753 901 657	33,85	1	0,176	81	105	39	48	19	9-11
63	50	753 901 658	33,85	1	0,176	81	105	43	48	15	9-11

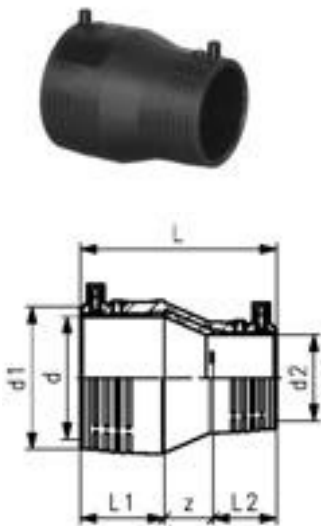


Réductions

- 10 bar gaz / 16 bar eau
- connecteurs 4 mm
- indicateur de soudage

d	d2	DN	PN	SDR	Code	EUR	poids
(mm)	(mm)	(mm)	(bar)				(kg)
90	63	80	16	11	753 901 831	58,46	0,385
110	63	100	16	11	753 901 832	sur demande	0,644
110	90	100	16	11	753 901 833	88,62	0,700
125	90	100	16	11	753 901 836	112,12	0,891
160	90	150	16	11	753 901 839	118,16	1,600
160	110	150	16	11	753 901 864	122,84	1,783
180	125	150	16	11	753 901 865	182,82	2,340


d	d2	d1	L	L1	L2	z	Tube SDR
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
90	63	113	146	63	47	36	9-17.6
110	63	140	184	71	58	55	9-11
110	90	138	173	73	63	38	9-17.6
125	90	152	194	77	62	55	9-17.6
160	90	202	227	90	72	65	9-17.6
160	110	202	226	90	71	65	9-17.6
180	125	225	254	96	78	80	9-17.6



Réductions

- **PE 100 SDR 11** (ISO S5)
- 10 bar gaz / 16 bar eau
- connecteurs 4 mm
- indicateur de soudage
- 2 zones de soudage séparées

d (mm)	d2 (mm)	Code	EUR	poids (kg)	d1 (mm)	L (mm)	L1 (mm)	L2 (mm)	z (mm)	Tube SDR
200	160	753 901 837	1.012,91	5,098	250	365	104	90	171	11-26
225	160	753 901 838	1.244,31	6,000	280	385	112	90	183	11-26
225	200	753 901 845	1.244,31	8,200	280	390	112	104	173	11-26
250	160	753 901 840	1.504,80	7,860	310	400	123	90	187	11-26
250	200	753 901 841	1.504,80	8,480	310	417	123	104	200	11-26
250	225	753 901 842	1.504,80	8,450	310	430	123	112	204	11-26



Kit de réduction avec manchon

- **PE 100 SDR 11** (ISO S5)
- 10 bar gaz / 16 bar eau
- Dispositif de serrage intégré (jusqu'au d 63 mm)
- connecteurs 4 mm
- indicateur de soudage
- Livré sous forme de kit incluant deux manchons ELGEF® Plus et une réduction mâle à bouts lisses

d (mm)	d2 (mm)	Code	EUR	SP	poids (kg)	d1 (mm)	L (mm)	L1 (mm)	L2 (mm)	z (mm)
75	40	193 280 992	sur demande	1	0,574	96	265	55	40	170
75	50	193 280 993	sur demande	1	0,623	96	269	55	44	170
75	63	193 280 994	sur demande	1	0,700	96	273	55	48	170
90	50	193 280 958	sur demande	1	0,857	113	297	63	44	190
90	75	193 280 995	sur demande	1	1,071	113	308	63	55	190
110	75	193 280 996	sur demande	1	1,496	138	333	73	55	205
125	63	193 280 953	sur demande	1	1,567	154	314	79	48	187
125	110	193 280 951	sur demande	1	2,098	154	367	79	73	215
160	125	193 280 952	sur demande	1	3,252	196	414	90	79	245
180	110	193 280 959	sur demande	1	4,167	214	413	95	73	245