


COOL-FIT 2.0 réduction

Exécution:

- PE100 SDR11 pré-isolé, métrique
- Isolation en mousse GF HE
- Impact résistant. Couleur: noir
- A: Raccord électrosoudable avec lèvre d'étanchéité intégrée pour un assemblage étanche à l'eau et à la vapeur
- B: Raccord à bout lisse

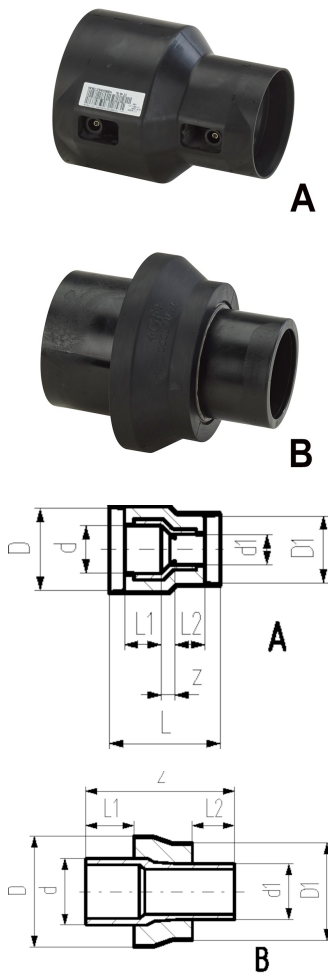

d	d1	D	D1	DN	SDR	PN	Code	poids	L	L1	L2	Type	z
(mm)	(mm)	(mm)	(mm)	(mm)		(bar)		(kg)	(mm)	(mm)	(mm)		(mm)
40	32	90	75	32	11	16	738 904 206	0,125	131	40	36	A	17
50	32	90	75	40	11	16	738 904 209	0,154	139	44	36	A	21
50	40	90	90	40	11	16	738 904 210	0,153	137	44	40	A	15
63	32	110	75	50	11	16	738 904 212	0,198	148	48	36	A	26
63	40	110	90	50	11	16	738 904 213	0,221	147	48	40	A	21
63	50	110	90	50	11	16	738 904 214	0,219	147	48	44	A	17
90	63	140	110	80	11	16	738 904 222	0,464	187	62	48	A	39
110	90	160	140	100	11	16	738 904 229	0,799	214	72	62	A	42
75	63	125	110	65	11	16	738 904 318	0,244		55	48	B	170
90	63	140	110	80	11	16	738 904 322	0,360		62	48	B	190
90	75	140	125	80	11	16	738 904 323	0,395		62	55	B	190
110	63	160	110	100	11	16	738 904 327	0,523		72	48	B	205
110	75	160	125	100	11	16	738 904 328	0,553		72	55	B	205
110	90	160	140	100	11	16	738 904 329	0,599		72	62	B	205
140	63	200	110	125	11	16	738 904 340	0,917		84	48	B	225
140	75	200	125	125	11	16	738 904 341	0,997		84	55	B	237
140	90	200	140	125	11	16	738 904 342	1,039		84	62	B	238
140	110	200	160	125	11	16	738 904 343	1,051		84	72	B	233

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>