




## Té réduit à 90° COOL-FIT 2.0

### Exécution:

- PE100 SDR11 pré-isolé, métrique
- Isolation en mousse GF HE
- Impact résistant. Couleur: noir
- A: Raccord électrosoudable avec lèvre d'étanchéité intégrée pour un assemblage étanche à l'eau et à la vapeur à bout lisse.

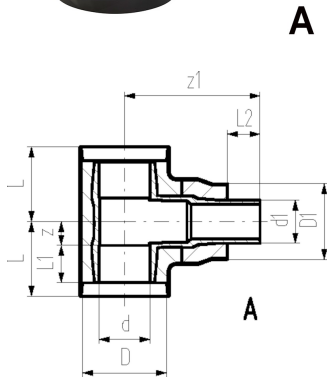

| d    | d1   | D    | D1   | DN   | SDR | PN    | Code               | poids | L    | L1   | L2   | Type | z    | z1   |
|------|------|------|------|------|-----|-------|--------------------|-------|------|------|------|------|------|------|
| (mm) | (mm) | (mm) | (mm) | (mm) |     | (bar) |                    | (kg)  | (mm) | (mm) | (mm) |      | (mm) | (mm) |
| 75   | 63   | 125  | 110  | 65   | 11  | 16    | <b>738 204 218</b> | 0,746 | 110  | 55   | 48   | A    | 36   | 200  |
| 90   | 63   | 140  | 110  | 80   | 11  | 16    | <b>738 204 222</b> | 1,096 | 124  | 62   | 48   | A    | 42   | 227  |
| 90   | 75   | 140  | 125  | 80   | 11  | 16    | <b>738 204 223</b> | 1,133 | 124  | 62   | 55   | A    | 42   | 227  |
| 110  | 63   | 160  | 110  | 100  | 11  | 16    | <b>738 204 227</b> | 1,746 | 148  | 72   | 48   | A    | 57   | 245  |
| 110  | 75   | 160  | 125  | 100  | 11  | 16    | <b>738 204 228</b> | 1,782 | 148  | 72   | 55   | A    | 57   | 245  |
| 110  | 90   | 160  | 140  | 100  | 11  | 16    | <b>738 204 229</b> | 1,848 | 148  | 72   | 62   | A    | 57   | 245  |
| 140  | 63   | 200  | 110  | 125  | 11  | 16    | <b>738 204 240</b> | 3,685 | 169  | 84   | 48   | A    | 66   | 221  |
| 140  | 75   | 200  | 125  | 125  | 11  | 16    | <b>738 204 241</b> | 3,724 | 169  | 84   | 55   | A    | 66   | 231  |
| 140  | 90   | 200  | 140  | 125  | 11  | 16    | <b>738 204 242</b> | 3,807 | 169  | 84   | 62   | A    | 66   | 234  |
| 140  | 110  | 200  | 160  | 125  | 11  | 16    | <b>738 204 243</b> | 3,990 | 169  | 84   | 72   | A    | 66   | 243  |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>