




Kit de vanne papillon manuelle type 567 COOL-FIT 2.0


Exécution:

- Matériel: PVC-U avec pièces folles PE100 SDR11 métriques
- Y compris collets, brides PP-Ac, boulons et demi-coquilles d'isolation



d (mm)	DN (mm)	PN	valeur kv ($\Delta p=1$ bar) (L/min)	EPDM Code	poids (kg)
110	100	10	6500	138 567 314	3,500
140	125	10	11500	138 567 316	4,500

d (mm)	D (mm)	D1 (mm)	D2 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	z (mm)	z1 (mm)	z2 (mm)
110	260	188	168	552	72	255	106	325	104	167	55	696	320	56
140	287	233	208	662	84	255	106	352	117	181	55	830	383	64

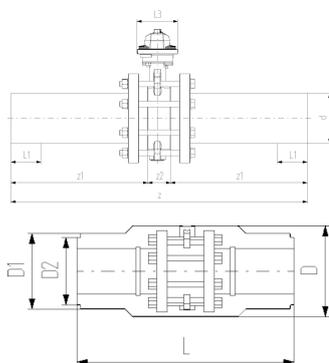

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>